

# EMVA 1288 Report Summary Cover Page

Package includes all associated EMVA Report Summaries valid for the following Phantom camera models

## S711

Refer to the report corresponding with your camera configuration:

- Monochrome models: PDF pages 2-3
- Color models: PDF pages 4-7

Each report summary was generated by Vision Research in accordance with the EMVA 1288 3.1 standard.


For more information on EMVA 1288 image measurements visit:  
[www.phantomhighspeed.com/emva](http://www.phantomhighspeed.com/emva)

## EMVA 1288 Data Sheet m0368

This datasheet describes the specification according to the standard 1288 release 3.1 for "Characterization and Presentation of Specification Data for Image Sensors and Cameras" issued on December 30, 2016 by the European Machine Vision Association (EMVA), published at [www.standard1288.org](http://www.standard1288.org) and the *zenodo EMVA 1288 community* with proprietary extensions from AEON. The measurements were performed with the AEON ACC2b RGB-IR, Release 9, 31.10.2023, SN 0032(AMETEK).

Measurements were performed by Vision Research. Measurements are on raw sensor data.

Vendor	Vision Research	Type of data presented	Single
Model	Phantom S711	<b>Operation point 1</b>	
Serial number	550	Wavelength centroid	531.5 nm
Sensor diagonal	30.19 mm	Wavelength FWHM	31.2 nm
Lens category	F-Mount	Gain, black-level	1.3 / 0
Resolution	1280 × 800, 12 bit	<b>Optional data measured</b>	
Pixel size (h×v)	20.00 μm × 20.00 μm	None	
Sensor	Vision Research Proprietary		
Sensor type	CMOS		
Shutter type	Global		
Overlap cap.	Overlapping		
Max. frame rate	5671.0 Hz		
Interface type	CoaXPress 2.0		

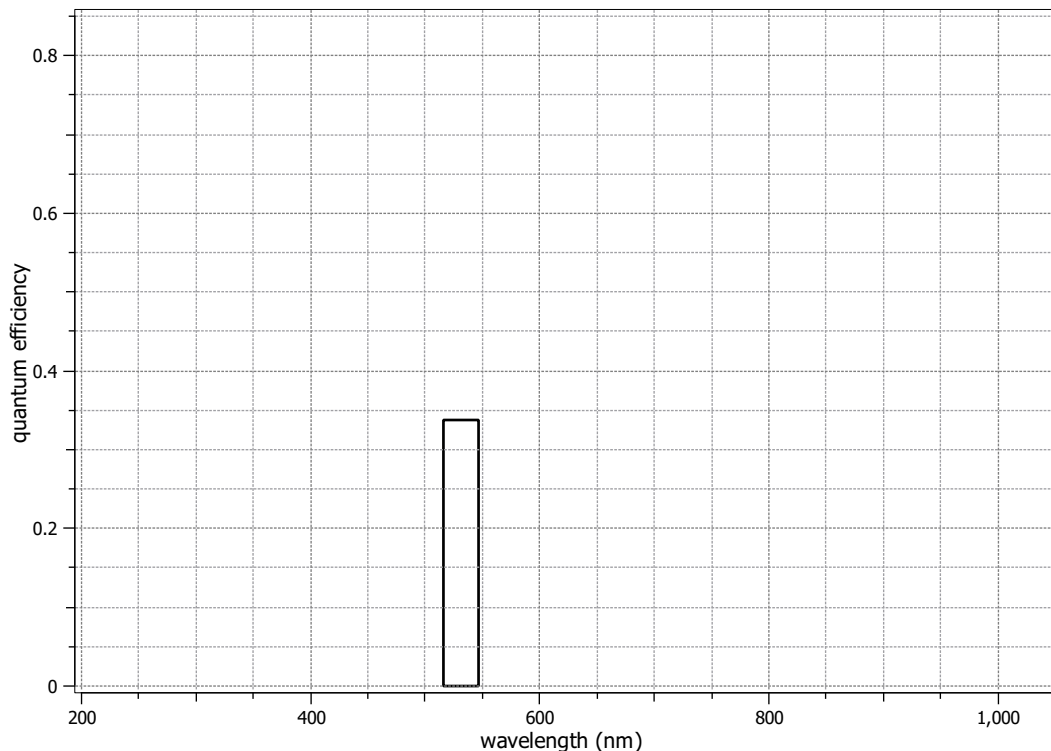


## Summary Sheet for Operation Point 1 at a Wavelength of 532 nm

Type of data	Single	Gain, black-level	1.3 / 0
Exposure control	By irradiance	Environmental temperature	23.8°C
Exposure time	90.00 μs	Camera body temperature	32.8°C
Frame rate	100.0 Hz	Internal temperature(s)	—
Data transfer mode	Mono 12	Wavelength, centr., FWHM	532 nm, 31.2 nm


### Photon Transfer

Photon transfer m0368, 532 nm, 06.12.2023

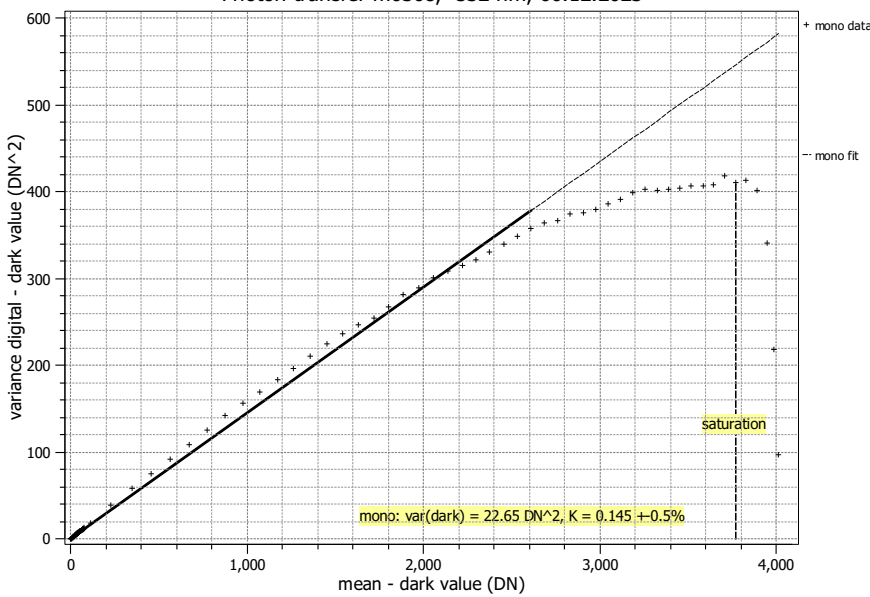

### Signal-to-Noise Ratio

SNR m0368, 532 nm, 06.12.2023

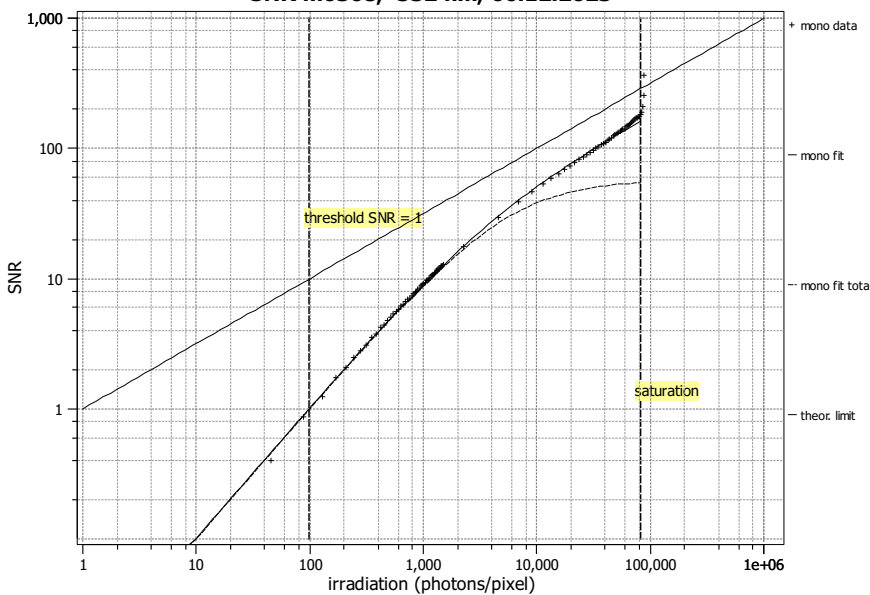

#### Quantum efficiency

$\eta$  33.7%

#### Overall system gain

$K$  0.145 DN/e<sup>-</sup>

$1/K$  6.903 e<sup>-</sup>/DN

#### Temporal dark noise

$\sigma_d$  32.79 e<sup>-</sup>

$\sigma_{y.dark}$  4.76 DN

#### Signal-to-noise ratio

SNR<sub>max</sub> 166

44.4 dB

7.4 bit

$1/SNR_{max}$  0.60 %

#### Absolute sensitivity threshold

$\mu_{p.min}$  99.0 p

$\mu_{p.min.area}$  0.25 p/μm<sup>2</sup>

$\mu_{e.min}$  33.4 e<sup>-</sup>

$\mu_{e.min.area}$  0.08 e<sup>-</sup>/μm<sup>2</sup>

#### Saturation capacity

$\mu_{p.sat}$  81372 p

$\mu_{p.sat.area}$  203 p/μm<sup>2</sup>

$\mu_{e.sat}$  27417 e<sup>-</sup>

$\mu_{e.sat.area}$  69 e<sup>-</sup>/μm<sup>2</sup>

#### Dynamic range

DR 822

58.3 dB

9.7 bit

#### Spatial nonuniformities

DSNU<sub>1288</sub> 4.84 e<sup>-</sup>

0.70 DN

PRNU<sub>1288</sub> 1.72 %

#### Linearity error

LE<sub>min</sub> -3.27%

LE<sub>max</sub> 1.94%

#### Dark current

$\mu_{c.mean}$  1038 ± 520 e<sup>-</sup>/s

150.3 DN/s

$\mu_{c.var}$  966 ± 50 e<sup>-</sup>/s


$T_d$  — °C

## EMVA 1288 Data Sheet m0371

This datasheet describes the specification according to the standard 1288 release 3.1 for "Characterization and Presentation of Specification Data for Image Sensors and Cameras" issued on December 30, 2016 by the European Machine Vision Association (EMVA), published at [www.standard1288.org](http://www.standard1288.org) and the *zenodo EMVA 1288 community* with proprietary extensions from AEON. The measurements were performed with the AEON ACC2b RGB-IR, Release 9, 31.10.2023, SN 0032(AMETEK).

Measurements were performed by Vision Research. Measurements are on raw sensor data.


Vendor	Vision Research	Type of data presented	Single
Model	Phantom S711	<b>Operation point 1</b>	
Serial number	495	Wavelength centroid	466.2 nm
Sensor diagonal	30.19 mm	Wavelength FWHM	20.3 nm
Lens category	F-Mount	Gain, black-level	1.3 / 0
Resolution	1280 × 800, 12 bit	<b>Operation point 2</b>	
Pixel size (h×v)	20.00 μm × 20.00 μm	Wavelength centroid	531.5 nm
Sensor	Vision Research Proprietary	Wavelength FWHM	31.2 nm
Sensor type	CMOS	Gain, black-level	1.3 / 0
Shutter type	Global	<b>Operation point 3</b>	
Overlap cap.	Overlapping	Wavelength centroid	629.4 nm
Max. frame rate	5671.0 Hz	Wavelength FWHM	13.3 nm
Interface type	CoaXPress 2.0	Gain, black-level	1.3 / 0
		<b>Optional data measured</b>	
		None	

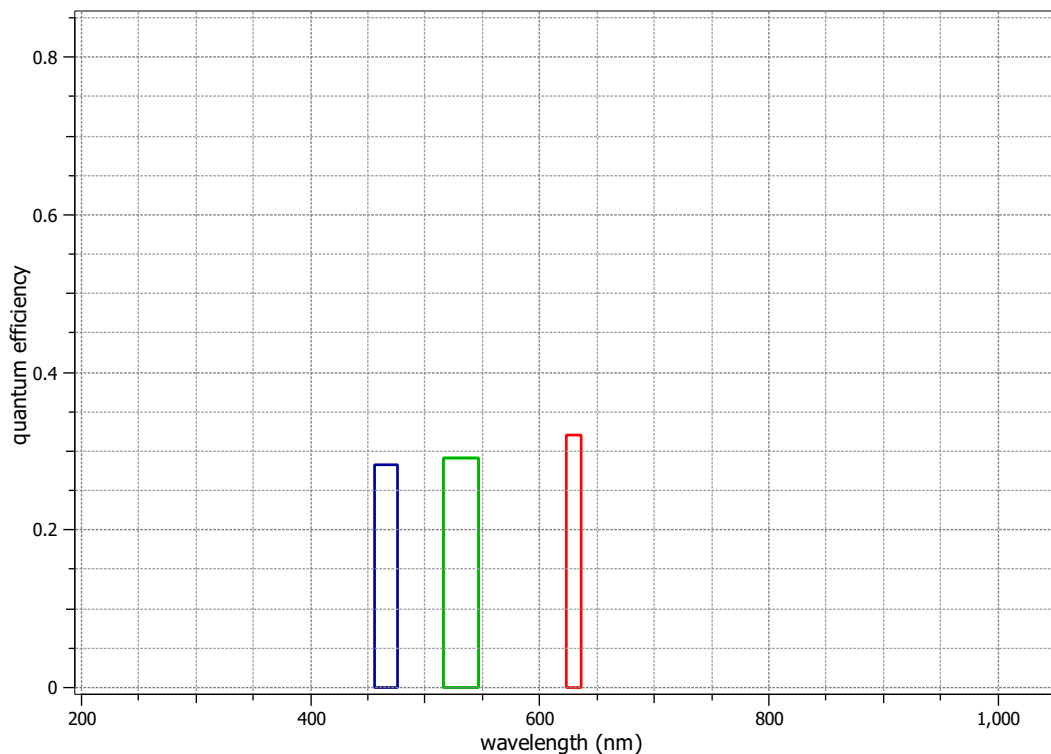


## Summary Sheet for Operation Point 1 at a Wavelength of 466 nm

Type of data	Single	Gain, black-level	1.3 / 0
Exposure control	By irradiance	Environmental temperature	23.9°C
Exposure time	90.00 $\mu$ s	Camera body temperature	32.6°C
Frame rate	100.0 Hz	Internal temperature(s)	—
Data transfer mode	Bayer GB12	Wavelength, centr., FWHM	466 nm, 20.3 nm

### Photon Transfer

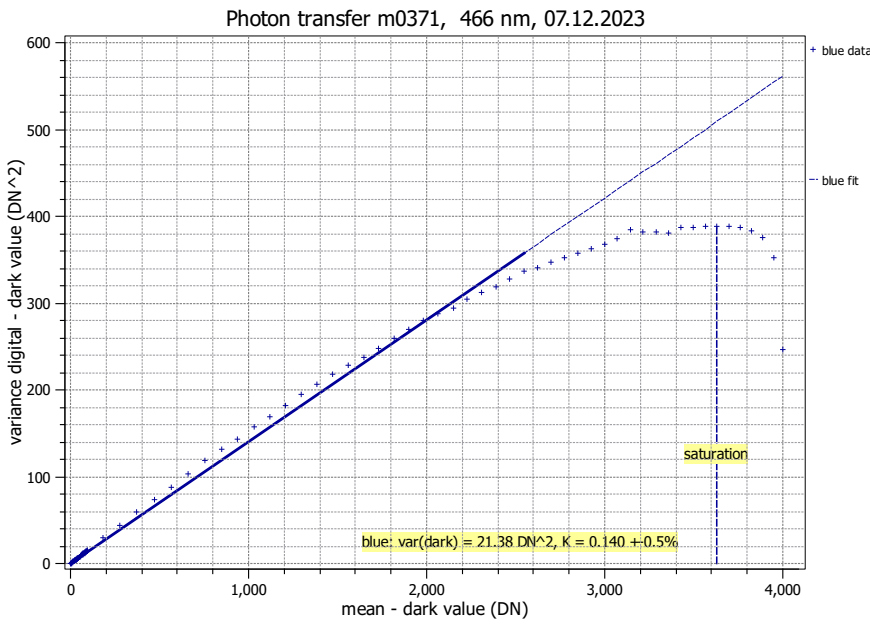

### Signal-to-Noise Ratio

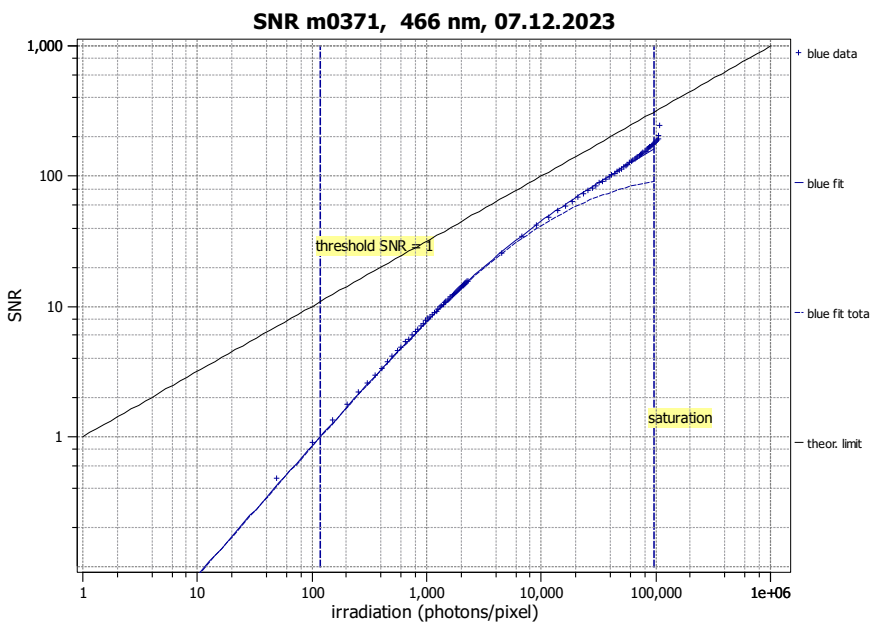


<b>Quantum efficiency</b>	
$\eta$	28.3%
<b>Overall system gain</b>	
$K$	0.140 DN/e <sup>-</sup>
$1/K$	7.130 e <sup>-</sup> /DN
<b>Temporal dark noise</b>	
$\sigma_d$	32.91 e <sup>-</sup>
$\sigma_{y,\text{dark}}$	4.62 DN
<b>Signal-to-noise ratio</b>	
SNR <sub>max</sub>	165
	44.4 dB
	7.4 bit
$1/\text{SNR}_{\text{max}}$	0.61 %
<b>Absolute sensitivity threshold</b>	
$\mu_{p,\text{min}}$	118.4 p
$\mu_{p,\text{min,area}}$	0.30 p/ $\mu$ m <sup>2</sup>
$\mu_{e,\text{min}}$	33.5 e <sup>-</sup>
$\mu_{e,\text{min,area}}$	0.08 e <sup>-</sup> / $\mu$ m <sup>2</sup>
<b>Saturation capacity</b>	
$\mu_{p,\text{sat}}$	96383 p
$\mu_{p,\text{sat,area}}$	241 p/ $\mu$ m <sup>2</sup>
$\mu_{e,\text{sat}}$	27241 e <sup>-</sup>
$\mu_{e,\text{sat,area}}$	68 e <sup>-</sup> / $\mu$ m <sup>2</sup>
<b>Dynamic range</b>	
DR	814
	58.2 dB
	9.7 bit
<b>Spatial nonuniformities</b>	
DSNU <sub>1288</sub>	5.33 e <sup>-</sup>
	0.75 DN
PRNU <sub>1288</sub>	0.90 %
<b>Linearity error</b>	
LE <sub>min</sub>	-3.03%
LE <sub>max</sub>	1.90%
<b>Dark current</b>	
$\mu_{c,\text{mean}}$	1002 ± 613 e <sup>-</sup> /s
	140.5 DN/s
$\mu_{c,\text{var}}$	1138 ± 253 e <sup>-</sup> /s
$T_d$	— °C

## Summary Sheet for Operation Point 2 at a Wavelength of 532 nm

Type of data	Single	Gain, black-level	1.3 / 0
Exposure control	By irradiance	Environmental temperature	23.9°C
Exposure time	90.00 $\mu$ s	Camera body temperature	32.7°C
Frame rate	100.0 Hz	Internal temperature(s)	—
Data transfer mode	Bayer GB12	Wavelength, centr., FWHM	532 nm, 31.2 nm


### Photon Transfer

Photon transfer m0371, 532 nm, 07.12.2023

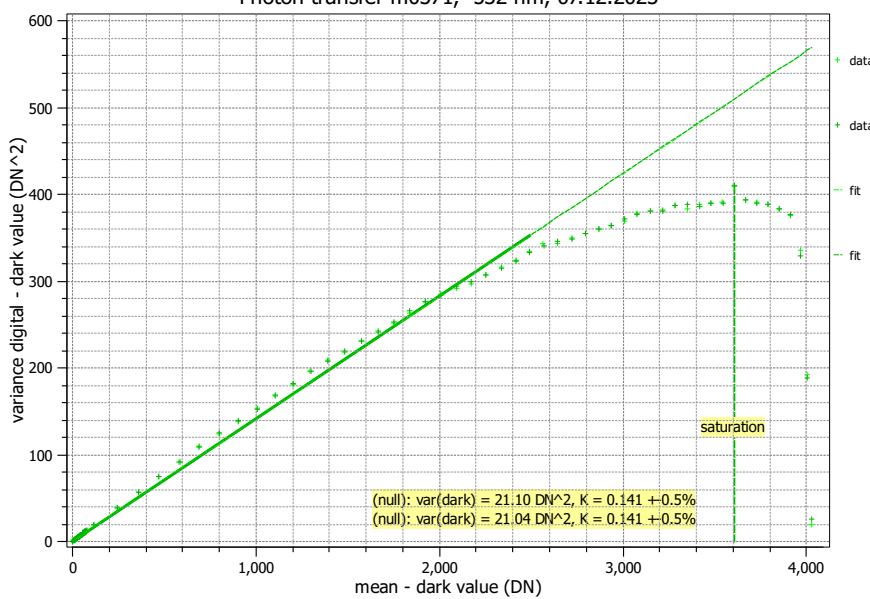

### Signal-to-Noise Ratio

SNR m0371, 532 nm, 07.12.2023

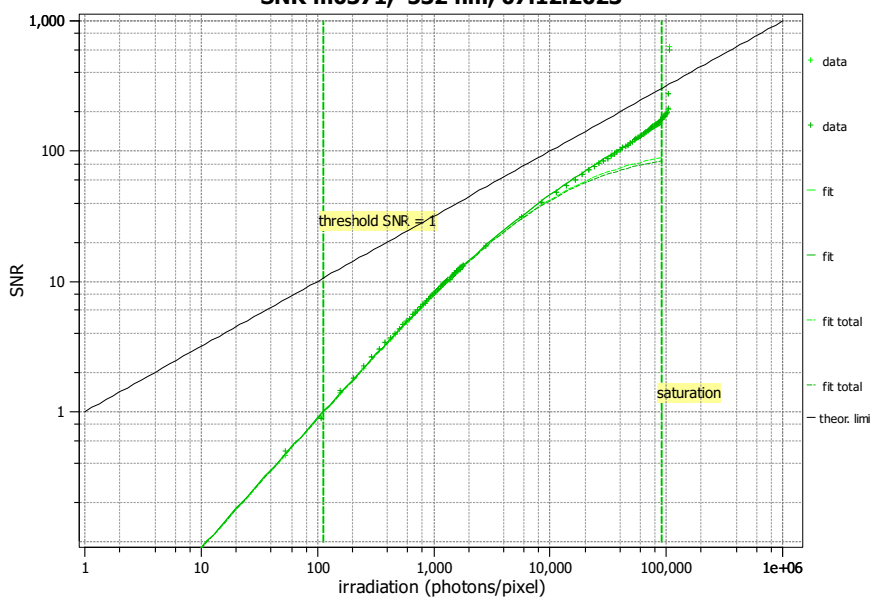

#### Quantum efficiency

$\eta$  29.1%

#### Overall system gain

$K$  0.141 DN/e<sup>-</sup>

1/ $K$  7.077 e<sup>-</sup>/DN

#### Temporal dark noise

$\sigma_d$  32.45 e<sup>-</sup>

$\sigma_{y,\text{dark}}$  4.59 DN

#### Signal-to-noise ratio

SNR<sub>max</sub> 164

44.3 dB

7.4 bit

1/SNR<sub>max</sub> 0.61 %

#### Absolute sensitivity threshold

$\mu_{p,\text{min}}$  113.4 p

$\mu_{p,\text{min,area}}$  0.28 p/ $\mu$ m<sup>2</sup>

$\mu_{e,\text{min}}$  33.0 e<sup>-</sup>

$\mu_{e,\text{min,area}}$  0.08 e<sup>-</sup>/ $\mu$ m<sup>2</sup>

#### Saturation capacity

$\mu_{p,\text{sat}}$  92166 p

$\mu_{p,\text{sat,area}}$  230 p/ $\mu$ m<sup>2</sup>

$\mu_{e,\text{sat}}$  26842 e<sup>-</sup>

$\mu_{e,\text{sat,area}}$  67 e<sup>-</sup>/ $\mu$ m<sup>2</sup>

#### Dynamic range

DR 813

58.2 dB

9.7 bit

#### Spatial nonuniformities

DSNU<sub>1288</sub> 5.98 e<sup>-</sup>

0.85 DN

PRNU<sub>1288</sub> 0.94 %

#### Linearity error

LE<sub>min</sub> -3.11%

LE<sub>max</sub> 2.15%

#### Dark current

$\mu_{c,\text{mean}}$  985  $\pm$  600 e<sup>-</sup>/s

139.2 DN/s

$\mu_{c,\text{var}}$  1155  $\pm$  260 e<sup>-</sup>/s


$T_d$  — °C

## Summary Sheet for Operation Point 3 at a Wavelength of 629 nm

Type of data	Single	Gain, black-level	1.3 / 0
Exposure control	By irradiance	Environmental temperature	24.0°C
Exposure time	90.00 $\mu$ s	Camera body temperature	32.7°C
Frame rate	100.0 Hz	Internal temperature(s)	—
Data transfer mode	Bayer GB12	Wavelength, centr., FWHM	629 nm, 13.3 nm


### Photon Transfer

Photon transfer m0371, 629 nm, 07.12.2023

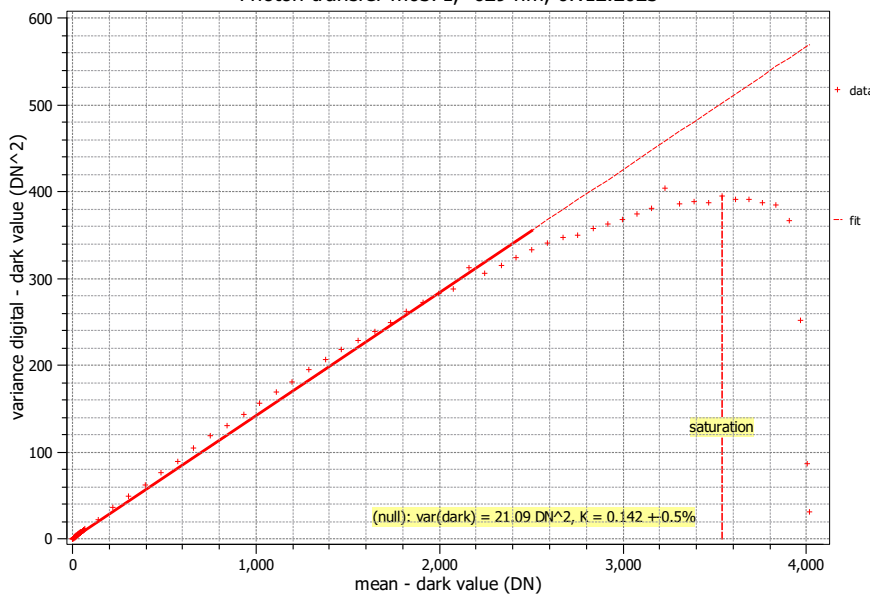

### Signal-to-Noise Ratio

SNR m0371, 629 nm, 07.12.2023

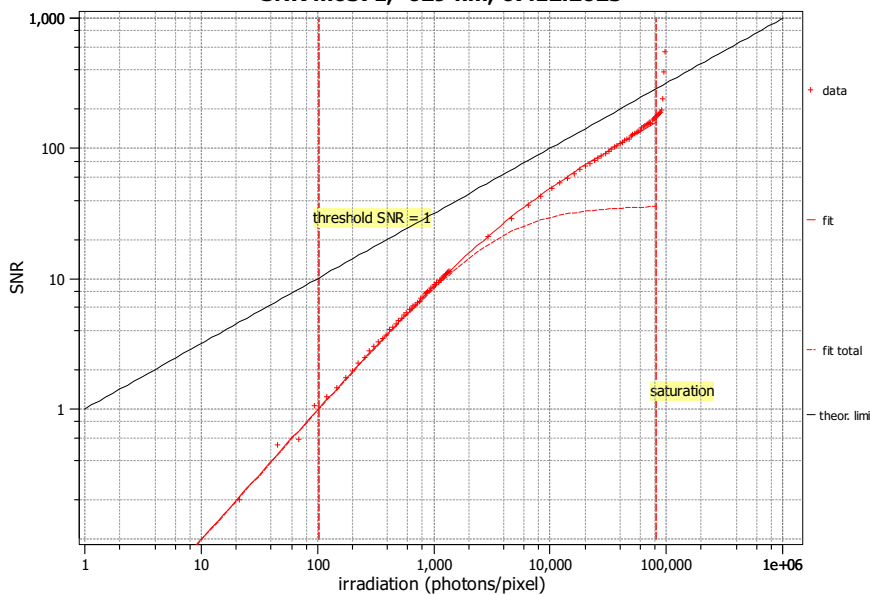

<b>Quantum efficiency</b>	
$\eta$	32.1%
<b>Overall system gain</b>	
$K$	0.142 DN/e <sup>-</sup>
$1/K$	7.050 e <sup>-</sup> /DN
<b>Temporal dark noise</b>	
$\sigma_d$	32.31 e <sup>-</sup>
$\sigma_{y.dark}$	4.59 DN
<b>Signal-to-noise ratio</b>	
SNR <sub>max</sub>	162
	44.2 dB
	7.3 bit
$1/\text{SNR}_{max}$	0.62 %
<b>Absolute sensitivity threshold</b>	
$\mu_{p.min}$	102.4 p
$\mu_{p.min.area}$	0.26 p/ $\mu$ m <sup>2</sup>
$\mu_{e.min}$	32.9 e <sup>-</sup>
$\mu_{e.min.area}$	0.08 e <sup>-</sup> / $\mu$ m <sup>2</sup>
<b>Saturation capacity</b>	
$\mu_{p.sat}$	81785 p
$\mu_{p.sat.area}$	204 p/ $\mu$ m <sup>2</sup>
$\mu_{e.sat}$	26263 e <sup>-</sup>
$\mu_{e.sat.area}$	66 e <sup>-</sup> / $\mu$ m <sup>2</sup>
<b>Dynamic range</b>	
DR	799
	58.0 dB
	9.6 bit
<b>Spatial nonuniformities</b>	
DSNU <sub>1288</sub>	5.58 e <sup>-</sup>
	0.79 DN
PRNU <sub>1288</sub>	2.73 %
<b>Linearity error</b>	
LE <sub>min</sub>	-3.37%
LE <sub>max</sub>	2.27%
<b>Dark current</b>	
$\mu_{c.mean}$	980 ± 612 e <sup>-</sup> /s
	138.6 DN/s
$\mu_{c.var}$	1230 ± 287 e <sup>-</sup> /s
$T_d$	— °C