



C321J Back

PHANTOM

Miro[®] C321J

Miro[®] C321

COMPACT
HIGH-SPEED CAMERAS

1,480 fps at full HD (1920 x 1080) resolution
Small and rugged
Flexible, with 2 models

FEATURES & BENEFITS

HIGH QUALITY HD IMAGES IN A COMPACT AND FLEXIBLE CAMERA

- Maximized image quality for reliable data even in challenging environments.
- “Set Default CSR” feature for consistent images on power-up, eliminating the need for CSR.
- 2 body types for specific system needs - the C321J for multi-camera set-ups with the Miro Junction Box, and the C321, for stand-alone use, or connected to the JBox with an adapter. They blend perfectly with Phantom off-board cameras for a full family solution.
- Proven design and independently tested rugged up to 170G. Tough, easy-to-use single cable system to Junction Box.

FOCUS ON DATA PROTECTION AND MANAGEMENT

- Internal, non-removable battery for data protection in case of power loss
- 240GB of internal Flash keeps data safe
- 8GB or 16GB of RAM, with up to 63 partitions for multiple shots

FRAME RATES & EXPOSURE	
Top FPS at Max Resolution	1,480
Maximum FPS	94,510
Minimum FPS	50
CAR Increments	640 x 8
Minimum Exposure	1 μ s
Electronic Shutter	Global Shutter
PIV Features	Shutter-off mode straddle time = 1180ns Supports Burst Mode
Exposure Features	Auto Exposure

IMAGING	
Sensor Type	CMOS
Maximum Resolution	1920 x 1080
Bit Depth	10-bit
Pixel Size	10 μ m
Sensor Size	19.2 x 10.8 mm; 22.03 mm diagonal
ISO Daylight (12232 STD)	Mono 10,000; Color 2,000
ISO Tungsten (12232 STD)	Mono 25,000; Color 2,500
Exposure Index	10,000 - 50,000 Mono; 2,000 - 10,000 Color
Dynamic Range	57 dB
Readout Noise	9.4 e-

FRAME RATE CHART

Table provides examples of common resolutions and frame rates. The record times shown are for 8GB RAM at the frame rate shown. Duration will be double for 16GB.

Maximum Frame Rate - FPS; (8GB Record time - Sec)	
Resolution (H x V)	Miro C321J / C321
1920 x 1080	1,480 (2.24)
1920 x 800	1,990 (2.25)
1280 x 1024	1,560 (3.36)
1280 x 512	3,090 (3.39)
640 x 480	3,290 (6.8)
640 x 128	11,765 (7.16)
640 x 64	22,070 (7.60)
640 x 8	94,510 (14.2)





CONNECTIVITY & SIGNALS		
	C321J	C321
Ethernet	Gb Ethernet accessed through System Cable	Gb Ethernet accessed through Fischer Connector
Timecode	IRIG In & Out- Unmodulated	IRIG In- Modulated/Unmodulated; IRIG Out - Unmodulated
Port Descriptions	Fischer 27-pin System port, for Trigger, IRIG In/Out, Strobe, Event, Memgate, FSYNC, READY Out, Programmable I/O, Power from J-Box	Fischer 12-Pin Capture port, for Trigger, IRIG In/Out, Strobe, Event, Memgate, FSYNC, READY Out, and Programmable IO Signals from MiniBoB
		Fischer 8-pin Gb Ethernet
		Fischer 6-pin Power
IO Signals	Programmable I/O for Fsync, Strobe, Ready, Timecode-out, Event, Memgate, Pretrigger. Assign and define signals in PCC	
Hardware Trigger	System cable, to Jbox	Capture port, to MiniBoB
Software Trigger	via PCC over Ethernet; via Image Based Auto trigger (IBAT)	
Synchronization	External Sync via FSync or IRIG Timecode	
Recording Features	Burst mode, Continuous recording & AutoSave to internal Flash	
Video Output	HD-SDI, through DIN connector on camera front	



Miro C321/C321J Connectors With the Miro Junction Box 2.0

CONTROL	
Software & OS	Phantom PCC (Windows x64); SDK available for C/C++, C#, Python, MatLab and LabView
Primary File Format	Phantom Cine RAW (.cine)
Alternative File Formats	Easily convert to formats including .mp4, Apple ProRes .mov, .avi, Tiff, JPG, DNG and many more using PCC Cine files are directly compatible with many major video editing and motion analysis programs
Highlighted Software Features	“Set New CSR Default” for stable black reference, Auto-Save to Flash, Continuous recording, Advanced Image Tools and Processing

MEMORY & STORAGE

RAM Buffer	8GB, 16GB RAM
Multi-Cine	Up-to 63 Partitions
Non-Volatile Media	240GB of internal Flash included

POWER

AC Power	100 - 250 VAC, 40W power supply included with C321 Model
Voltage Range	16-36VDC
Power Consumption	14W typical, up to 22W when charging battery
Battery Options	Internal battery included for data protection

MECHANICAL

Housing Variants	C321J and C321
Size	C321J: 2.9 x 3.1 x 3.4" (73 x 79.5 x 87.2 mm); C321: 2.9 x 2.9 x 3.4" (73 x 73 x 87.2 mm)
Weight	1.2 lbs (0.54 kg)
Lens Mounts	1" C-Mount
Mounting Points	4 x 1/4-20, 16 x M4 x 0.7
Cooling	Active cooling. Quiet mode disables fans during capture.


ENVIRONMENTAL

Operating Temperature	0 to +50°C
Storage Temperature	-20 to +70°C
Operational Shock	170G, 6msec sawtooth, 3 axes, 2 directions per axis, 10 shock per direction (60 pulses total)
Operational Vibration	24 Grms, 50Hz-2KHz, 3 axes, 15 min/axis, IAW MIL-STD-202H Method 214-I, Test Condition G
Regulatory	Made in the USA CE Emissions - CE Compliant EN 61326-1 CE Immunity - CE Compliant EN 61326-1 FCC - CFR 47, Part 15, Subpart B & ICES-0003, Class A KC Emissions - KC Compliant - KS C 9832 KC Immunity - KC Compliant - KS C 9835 Safety - IEC 60950-1

GLOBAL SUPPORT NETWORK

The Phantom Miro C Cameras are supported by Vision Research's Global Service and Support network, offering PhantomCare Performance Services from multiple sites around the globe. Maximize the value of your Phantom camera with a selection of professional services from which to choose.

Learn more about our service offering at www.phantomhighspeed.com/Service-Support

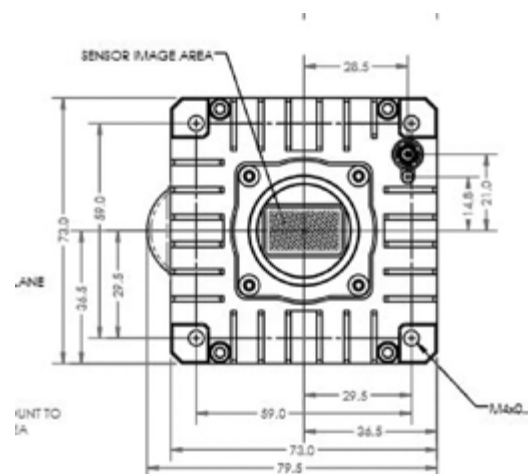

ABOUT VISION RESEARCH

Focused. Since 1950, Vision Research has been designing, and manufacturing high-speed cameras. Our single focus is to invent, build, and support the most advanced cameras possible.

ViSiON
RESEARCH

AMETEK[®]

100 Dey Road
Wayne, NJ 07470 USA
+1.973.696.4500